

FILTER CARTRIDGE REMOVAL/ REPLACEMENT

To maintain great tasting water, replace the filter cartridge when the LED flashes RED.

ADC Cartridge

- Reduces dirt, rust, asbestos fibers, and other particulates including sulfides (oxidized iron and manganese - as tested by Everpure).
- Treated with bacteriostat to effectively reduce the growth of bacteria on the filter media. (Not tested or certified by NSF.)
- The term "bacteriostatic" indicates that the system limits the passage or growth of bacteria that may already exist in the incoming water. It does not mean that the water leaving the system is safer to drink than the water entering the system.

The procedure listed below provides the steps for cartridge replacement:

- Twist the cover counterclockwise and lift away from the base.
- Lift filter cartridge away from base.
NOTE: There is no need to disconnect the tubing connections.
- Turn filter cartridge to the left, about 1/4 turn, until rotation stops, and pull away from filter head. Discard filter cartridge.
- Align replacement filter cartridge lug with label on filter head and push upwards into head.
- Turn cartridge to the right, about 1/4 turn, until rotation stops, and install cartridge into base.
- Press reset button to reset flow indicator.
- Install cover.
- Turn on cold water and turn the diverter lever down to flush system for 3 minutes.

This drinking water system must be maintained according to manufacturer's instructions, including replacement of filter cartridges. EV959201, ADC, Replacement Cartridge, Suggested list price: \$98.99



System Tested and Certified by NSF International against NSF/ANSI Standard 42 and 53 for the reduction of:

Std. No. 42–Aesthetic effects **Std. No. 53–Health effects**

Chemical Reduction

Taste & Odor

Chlorine


Mechanical Filtration

Nominal Particulate Class I:
99.2% reduction of particles one-half micron and larger in size.*

Mechanical Filtration

Cyst **

Asbestos

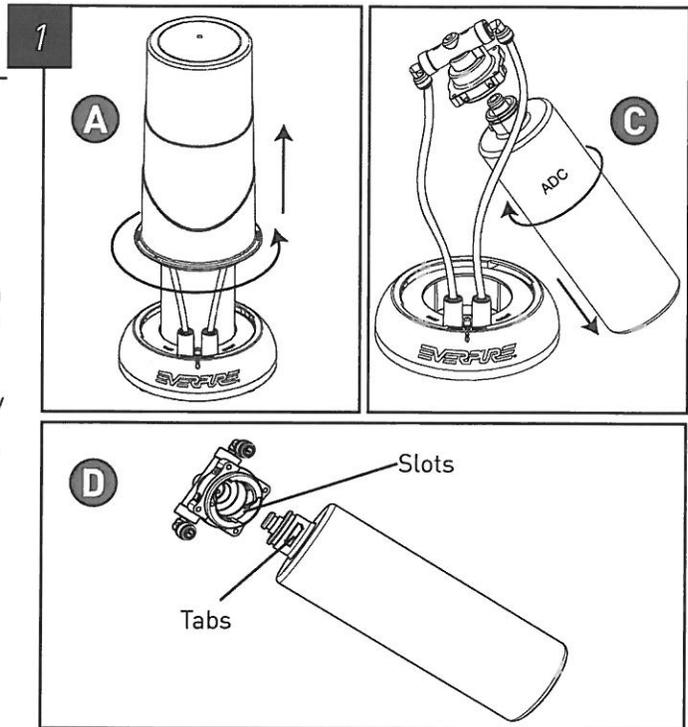

CLAIMS, PERFORMANCE & NOTES*

This system has been tested according to NSF/ANSI Standard 42 and 53 for the reduction of the substances listed below. The concentration of the indicated substances in water entering the system was reduced to a concentration less than or equal to the permissible limit for water leaving the system, as specified in NSF/ANSI 42 and 53.

*Tested using flow rate = 0.5 and 1.67 gpm; pressure = 60 ± 3 psig; pH = 7.5 ± 0.5; temp. = 20° ± 3°C

Substance	Influent Challenge Concentration	Max. Permissible Product Water Concentration	Reduction Requirements	Average Reduction
Standard 42–Aesthetic Effects				
Chlorine	2.0 mg/L ±10%		≥ 50%	87.8%
Particulate, Class I particles 0.5 to <1 μm *	at least 10,000 particles/mL		≥ 85%	99.2%
Standard 53–Health Effects				
Asbestos	10 ⁷ to 10 ⁸ fibers/L > 10 micrometers in length		99%	99.99%
Cyst **	Minimum 50,000/L		99.95%	99.99%

For installations in Massachusetts, the Commonwealth of Massachusetts Plumbing Code 248 CMR shall be adhered to. Consult your licensed plumber for installation of the system.

*Reduces particles as small as 0.5 micron in size by mechanical means.

**NSF/ANSI Standard 53 certified to reduce cysts such as Cryptosporidium and Giardia by mechanical means.

EPA #082989-CHN-001